

1 2 3 4 5 6 7 8

A






B

C

D

E

F

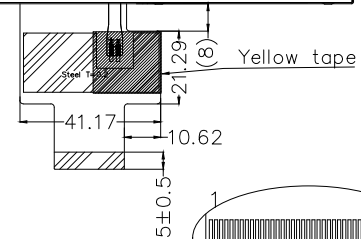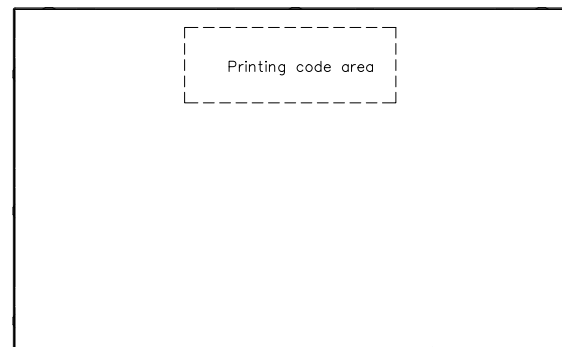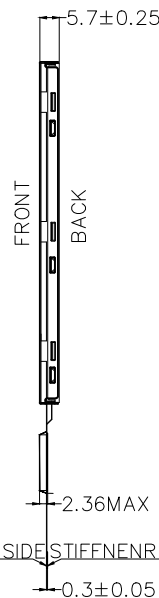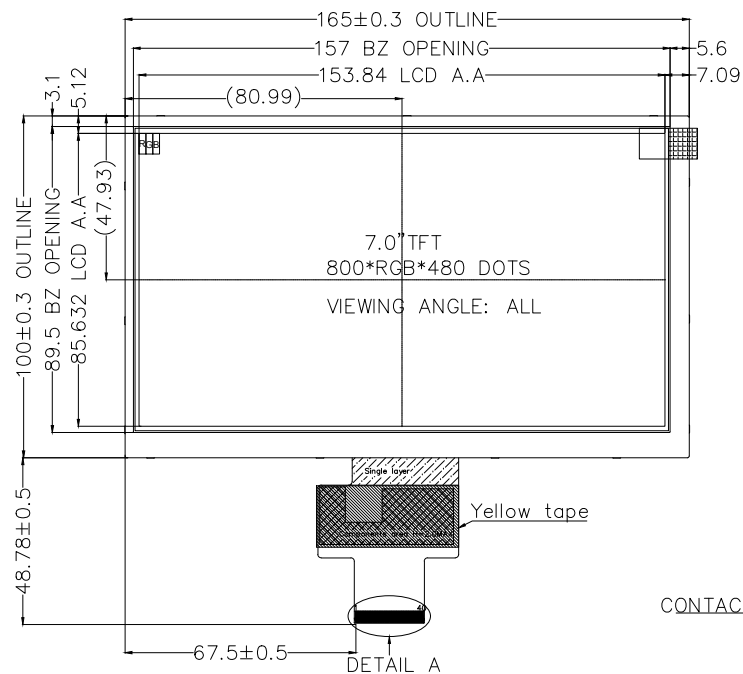

PIN	FUNCTION
1	NC
2	VDD
3	VDD
4	NC
5	RESET
6	STBYB
7	GND
8	RXIN0-
9	RXIN0+
10	GND
11	RXIN1-
12	RXIN1+
13	GND
14	RXIN2-
15	RXIN2+
16	GND
17	RXCLKIN-
18	RXCLKIN+
19	GND
20	RXIN3-
21	RXIN3+
22	GND
23	/CS
24	SDA
25	SCL
26	NC
27	NC
28	SELB(8/6 bits)
29	NC
30	GND
31	VLED-(0V)
32	VLED-(0V)
33	L/R
34	U/D
35	NC
36	LED_PWM
37	NC
38	NC
39	VLED+(5V)
40	VLED+(5V)

A

B

C


D

E

F

NOTES:

1. DISPLAY TYPE: 7.0TFT,NORMALLY BLACK
2. VIEWING DIRECTION : U/L/D/R 85/85/85/85
3. TFT Driver IC : ST7277 or EQU
4. Top : -20℃ ~ 70℃, Tst : -30℃ ~ 80℃
5. GENERAL TOLERANCE: ±0.2
6. LCM Luminance: 400cd²/m (Typical)



Victronix Tecenstar INT'L Co.,LTD

Approved By		SIZE:	7inch TFT Module
Checked By		DWARING_NO.:	VXT700KWSA-01
Drawn By	Solon2023.8.7	CUSTOMER_NO.	
UNIT:mm			

1 2 3 4 5 6 7 8